


## Magnetoelectric multimeter

**UM2010** is an analog multimeter, shock resistant thanks to a sturdy ABS body surrounded by a soft moulded holster.

The four salient corners act as shock absorbers. All ranges and functions can be selected by one rotary switch.

FUNCTIONS	RANGES	ACCURACY
VDC	100mV- 2.5 - 10 - 25 - 50 - 250 - 500 - 1000V	1.5 %
VAC	10 - 25 - 50 - 250 - 500 - 1000V	2.5 %
IDC	50 - 500 $\mu$ A - 2.5 - 5 - 25 - 50 - 250 mA - 1 - 10A	1.5 %
IAC	2.5 - 5 - 25 - 50 - 250 mA - 1 - 10A	2.5 %
OHM	1 - 10 - 100 - 1000 $k\Omega$	2 %
...	ring under 50 $\Omega$	

- Impedance: 20k $\Omega$ /VDC - 6k $\Omega$ /VAC
- Length of the scale: 90mm
- Safety sockets 4mm
- Protection at all ranges
- 2 fuses HBC 600V / 1A and HBC 600V / 10A
- Norm IEC 6110-1 CAT III 600V Pol 2 double insulation
- Sturdy ABS housing, protected by a shock resistant soft moulded holster, waterproof (IP65)
- Set of leads with test probes
- Dimensions 170 x 110 x 53 mm / Weight 0.5 kg

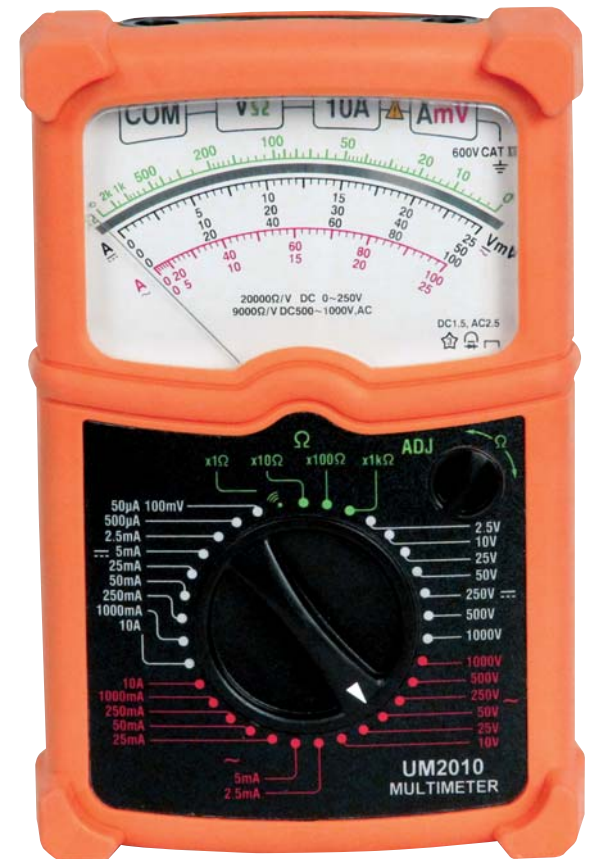

ref. UM2010

